Product Description: Manhole Cover

This six-claw quick-open manhole cover is a specialized maintenance and material-handling component designed for tank trucks, material storage tanks, and chemical storage and transportation tank vessels. The entire unit is integrally formed from stainless steel, offering advantages such as corrosion resistance, ease of cleaning, and high-strength sealing. It is widely compatible with various atmospheric/low-pressure tank vessels—including edible oil tanks, chemical liquid tanks, food transport tanks, and hazardous chemical storage and transportation tanks—making it a critical supporting component for tank manhole maintenance, material loading and unloading, and internal cleaning operations. It is also suitable for crystallization media, powdered materials, and light petroleum fuels such as gasoline, diesel, and kerosene.

Core Features: Characteristics of the Emergency Pressure Relief Device

Secondary activation protection design

When the handle is activated sequentially, the sealing interface of the large cover gradually releases internal pressure, thereby effectively ensuring the safety of the operator.

nominal diameter	20 inches
Emergency pressure activation	0.2Mpa
Maximum discharge rate	7500 m^3/h at 34 kPa
material quality	stainless steel
way to install	Welding of the circumferential joint at the top of the tank
operating temperature range	-40℃~+180℃

Tank truck component: Manhole cover series GY801K-500S1





●functional characteristics

1. Stainless steel mirror-polishing process, combining aesthetic appeal with durability.
2. Six-tooth fast-release locking mechanism: Multiple sets of eccentric locking claws uniformly clamp the sealing surface, ensuring easy operation during opening and closing, as well as stable sealing performance under pressure.
3. Equipped with a lead seal plate, enabling direct application of a lead seal.
4. Equipped with PTFE sealing, this component features high-temperature and high-pressure resistance, as well as explosion-proof capabilities.
5. The rotating shaft is equipped with an opening angle limiting device, which effectively prevents collision with the tank body during opening.



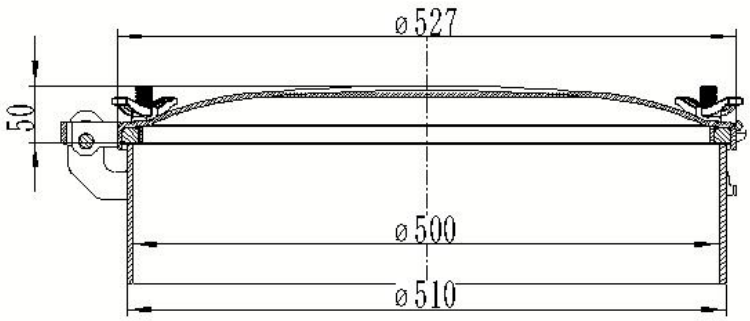


ø527
50
ø500
ø510

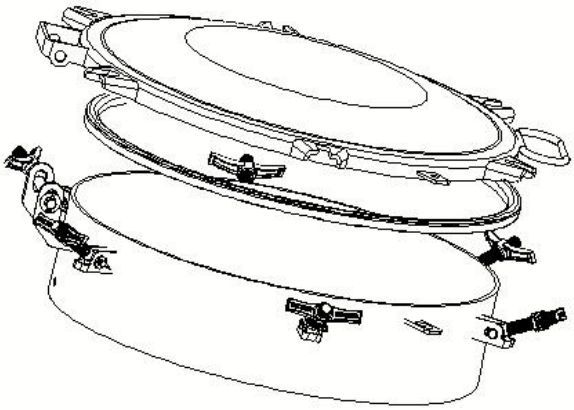


Tube Doors
Safety Vapor Vents
Tank Vapor Vent
Dust Caps & Plugs with Handles for Hose Tubes
FloTech Overfill Detection
Ladder Step
Safety Vapor Vents
Tube Doors
FUEL
API Rivet
Tube Doors
Single Point Vapor Recovery Foot Drop Co-Axial Elbow
Tube Doors
Tube Doors
Vapor Adapter
VAPOR
Tube Doors
Drop Hose Pumps
FUEL